



F&F Filipowski sp. j.
Konstantynowska 79/81 95-200 Pabianice
phone/fax: (+48 42) 215 23 83 / 227 09 71 POLAND
http://www.fif.com.pl e-mail: biuro@fif.com.pl

ELECTRONIC BI-STABLE
PULSE RELAY

BIS-411
230V

WARRANTY. The F&F products are covered by a warranty of 24 months from the date of purchase. Activate only with proof of purchase. Contact your dealer or directly with us. More information how to make a complaint can be found on the website: www.fif.com.pl/reklamacje




5 9 0 8 3 1 2 5 9 4 0 1 7 >

Do not dispose of this device to a garbage bin with other unsorted waste!
In accordance with the Waste Electrical and Electronic Equipment Act any household electro-waste can be free of charge and in any quantity to a collection point established for this purpose, as well as to the store in the event of purchasing new equipment (as per the old for new rule, regardless of brand). Electro-waste thrown in the garbage bin or abandoned in the bosom of nature pose a threat to the environment and human health.



Purpose

Electronic bi-stable pulse relays BIS-411 230V enables the user to actuate lighting or other devices from various locations by means of control buttons in parallel connection.

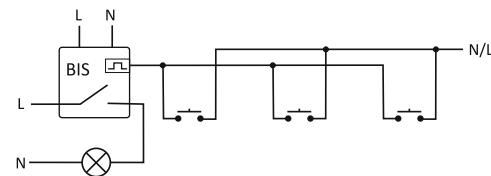


- 1 -

Technical data

power supply	100÷265V AC
contact	separated 1xNO/NC
current load (AC-1)	16A
control pulse	110÷265V AC <20mA
max current control buttons	≤5mA
activation delay	0.1÷0.2sec
signalling of supply	green LED
signalling of activation	red LED
power consumption	
standby	0.15W
on	0.6W
working temperature	-25÷50°C
connection	
tightening torque	2.5mm² screw terminals
dimensions	0.4 Nm
mounting	1 module (18mm)
protection level	on the TH-35 rail
	IP20

Wiring diagram

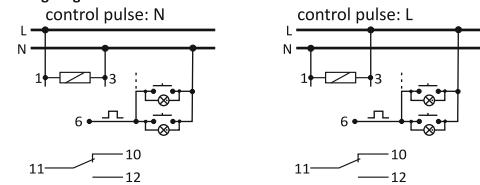

SUPPLY

1-3 power relay: 100-265V AC

CONTROL INPUTS

6 control inputs

CONTACT

11 power input contact COM

10 output: NC contact (passive)

12 output: NO contact (active)


Functioning

The receiver is actuated by means of a current pulse triggered by pushing any bell push connected to the relay. The receiver is deactivated by another pulse or after a preset time. The relay does not „memorize” the position of the relay contact, i.e. in case of supply voltage decay and the subsequent return of supply voltage, the relay contact will be set in the off position. Such a solution prevents the automatic actuation of the receivers controlled that might occur without proper supervision after a long-lasting decay of supply voltage.

Assembly

1. Turn OFF the power.
2. Put on the relay on the rail in the switchgear box.
3. Connect the power cable to contacts 1-3 with accordance chosen control option the relay (control pulse L or N).
4. The timers switching which are connect in parallel connect to contact 6 and to cable which is connect to contact 3.
5. The activated receiver connect in series to contacts 11-12.

Attention!

The BIS-411 230V is compatible with bell pushes equipped with fluorescent lamps ($\Sigma I < 5\text{mA}$). 

- 2 -

Example of relay connection with N control pulse

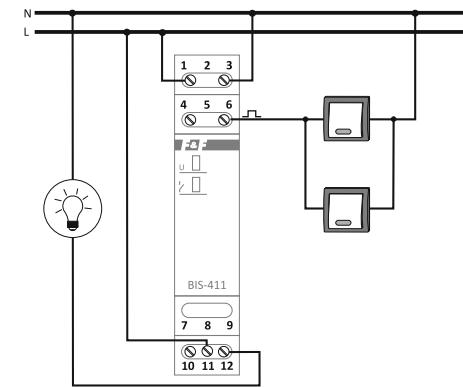


Table of power

	incandescent		halogen		fluorescent		energy-saving		LED
	2000W		1250W		1000W		500W		250W

The above data are indicative and will heavily depend on the design of a specific receiver (that is especially important for LED bulbs, energy-saving lamps, electronic transformers and pulse power supply units), switching frequency and operating conditions.

For more information visit www.fif.com.pl

D170425

- 4 -