



F&F Filipowski sp. j.
Konstantynowska 79/81 95-200 Pabianice
phone/fax: (+48 42) 215 23 83 / 227 09 71 POLAND
http://www.fif.com.pl e-mail: fif@fif.com.pl

ELECTROMAGNETIC
RELAY

PP-1P
24V

WARRANTY. The F&F products are covered by a warranty of the 24 months from the date of purchase. Effective only with proof of purchase. Contact your dealer or us with us. More information how to make a compliant can be found on the website: www.fif.com.pl/reklamacje

Do not dispose of this device to a garbage bin with other unsorted waste!



In accordance with the Waste Electrical and Electronic Equipment Act any household electro-waste can be turned in free of charge and in any quantity to a collection point established for this purpose, as well as to the store in the event of purchasing new equipment (as per the old for new rule, regardless of brand). Electro-waste thrown in the garbage bin or abandoned in the bosom of nature pose a threat to the environment and human health.

5 9 0 8 3 1 2 5 9 8 5 2 7

Technical data

power supply	7÷30V AC / 9÷40V DC
contact / load current AC-1	1NO/NC / <16A 250V AC
usage category	AC-7a
activation time	max. 40ms
switch-off time	max. 20ms
mechanical durability	min. 5x10 ⁶ cycles
power indicator	LED
power consumption	<0.6W
terminal	2.5mm ² screw terminals
tightening torque	0.4Nm
dimensions	Ø54 (□48x43mm), h=25mm
mounting	in flush-mounted Ø60
ingress protection	IP20


Table of power

	incandescent	halogen	fluorescent	energy saving	LED
300W	300W	250W	150W	75W	75W

The above data are indicative and will depend to a large extent on the design of a specific receiver (especially for LED bulbs, energy saving lamps, electronic transformers and pulse power supplies), switching frequency and working conditions.

For more information visit: www.fif.com.pl.

Connection scheme

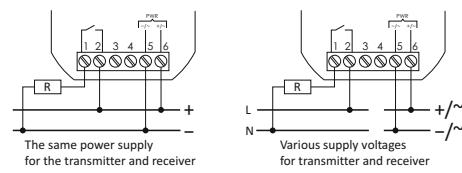

D150410

- 2 -